


3 LEADED, BI-COLOR PANEL MOUNT LED ASSEMBLY

PM5(R)3 SERIES
T 1 3/4 3 LEADED PANEL MOUNT ASSEMBLY

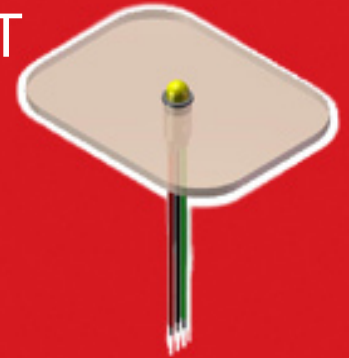


3 LEADED, BI-COLOR PANEL MOUNT, LED ASSEMBLY (PM5(R)3 SERIES): In addition to multi-color status indicator, the new PM5-3 Series also offers multiple configuration choices that include stripped wires and 0.100" pitch 3-pin connector. The new series is available in 0.16" protrusion and recessed versions, giving engineers design options for how the LED will appear in an end-product application. The new series is available with unlimited wire lengths (even greater than 48" if necessary), is vibration resistant and easy to install.

FEATURES

- Multi color status indicator
- White diffused lens appearance offers wide viewing angle and uniform indication
- Industrial Panel Mount package fits 0.047" or thicker panel with 0.250" mounting hole
- Standard 3-Leaded common cathode, Bi-Color 5mm LEDs displays multiple signals with color mixing capability
- Available in 0.16" protrusion (PM53) and recessed (PM5R3) versions
- Available in 0.25" stripped wires, 0.100" pitch 3 pin connector or leads only
- Wire lengths up to 48"
- 94V-0 Rated engineering plastic holder
- RoHS compliant

RECESSED LENS



PROTRUDED LENS

APPLICATIONS

Computer • Power Supplies • Data Storage • Industrial Machinery
• Test & Measurement Equipment